

# TekIVR - SIP Interactive Voice Response System

TekIVR is a SIP Interactive Voice API System (IVR) which provides "Call Attendant" function (Based on RFC 3261) runs under Windows (XP, Vista, 7, 8, 10 2003-2016 Server)


TekIVR also checks if it is installed behind an UPnP supported NAT gateway. If so, TekIVR automatically detects external IP and display it on status bar. TekIVR can also add a reverse mapping for incoming connections automatically (Default UDP port 5070) through UPnP.



TekIVR - Settings


## Major features

- Simple, easy to use interface.
- You can create your own IVR scenario using built-in scenario editor. You can select your own audio files to be used in IVR scenario (They must be a wav file in 16 bit per sample, 1 channel and 8000 Hz sampling frequency).
- TekIVR supports TTS with Microsoft SAPI and MRCPv2. You can use Speech Synthesis Markup Language (SSML) while defining prompts.
- TekIVR supports Automatic Speech Recognition (ASR) with Microsoft SAPI, Google Cloud SAPI and MRCPv2.
- Supports G.711 A - Mu law and G.722 codecs.
- Supports NAT traversal. TekIVR also supports UPnP.
- Call transfer accomplished by using SIP REFER method (RFC 3515), Bridge or by sending DTMF (RFC 2833 / SIP INFO).
- TekIVR has a built-in SIP presence client and can get an extensions' online status prior to transfer a call to the extension. You can also monitor presence status of extensions in extensions tab of TekIVR Manager.
- TekIVR can record and send incoming calls for configured SIP extensions via e-mail (Voice Mail feature).
- Supports, UDP, TCP and TLS transports with RTP and SRTP.
- You can dial into TekIVR and listen recorded messages in your mailbox. TekIVR supports Voice Mail Indication (RFC 3842).
- HTTP interface. All functions implemented in Win 32 GUI can be accessible through HTTP interface.
- You can monitor active SIP calls in real-time.

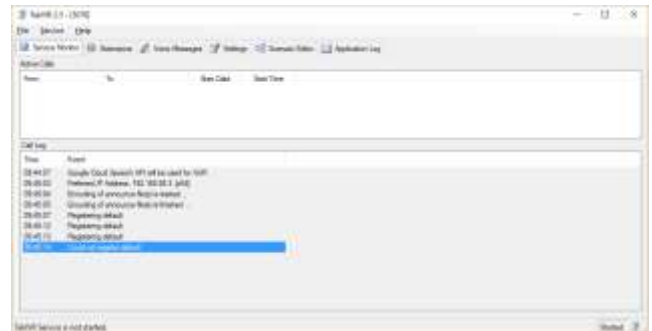

Service Monitor Tab

You can monitor active calls through service monitor tab.

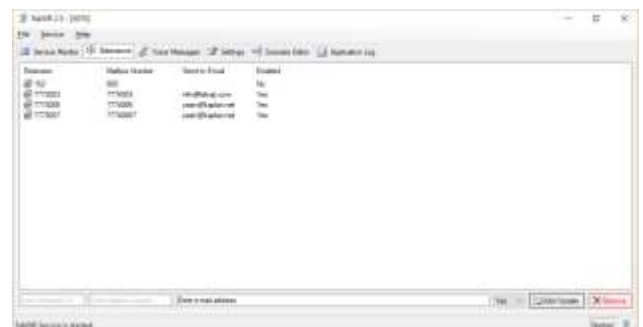

Extensions Tab

You can define extensions, their mailbox numbers and optionally their e-mail address for sending recorded audio messages through Extensions tab.




Scenario Editor / Prompts Tab

## Scenario Editor

You can create your own IVR scenario using built-in Scenario Editor. TekIVR supports following actions in IVR

scenarios; Play, Synthesize, Recognize, Wait, Record, Evaluate, Transfer, Execute and Exit.

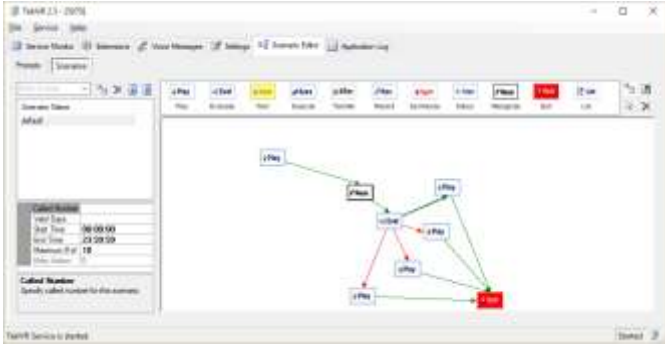

Scenario Editor / Scenarios Tab

You can define multiple scenarios based on time of date and called number.

## System Requirements

TekIVR requires Microsoft .NET Framework 4.0 installed with the latest patches. Pentium class CPU with 2048 MB of RAM is ideal for most configurations.

## Supported RFCs

- **RFC 2617** HTTP Authentication: Basic and Digest Access Authentication
- **RFC 2782** A DNS RR for specifying the location of services (DNS SRV)
- **RFC 2976** SIP INFO Method
- **RFC 3261** SIP: Session Initiation Protocol
- **RFC 3262** Reliability of Provisional Responses in the Session Initiation Protocol (SIP)
- **RFC 3265** Session Initiation Protocol (SIP)- Specific Event Notification
- **RFC 3515** The Session Initiation Protocol (SIP) Refer Method
- **RFC 3550** RTP: A Transport Protocol for Real-Time Applications
- **RFC 3551** RTP Profile for Audio and Video Conferences with Minimal Control
- **RFC 3711** The Secure Real-time Transport Protocol (SRTP)
- **RFC 3842** A Message Summary and Message Waiting Indication Event Package for the Session Initiation Protocol (SIP)
- **RFC 3856** A Presence Event Package for the Session Initiation Protocol (SIP)
- **RFC 3891** The Session Initiation Protocol (SIP) "Replaces" Header
- **RFC 3892** The Session Initiation Protocol (SIP) Referred-By Mechanism
- **RFC 6787** Media Resource Control Protocol Version 2 (MRCPv2)

**KaplanSoft** Kaplan Bilişim Teknolojileri Yazılım ve Ticaret Ltd.

Büyükdere Cd. 67-71 K:9 Mecidiyeköy, Şişli, 34387, İstanbul

Phone: +90 (212) 356 12 12, E-mail: info@kaplansoft.com / sales@kaplansoft.com